
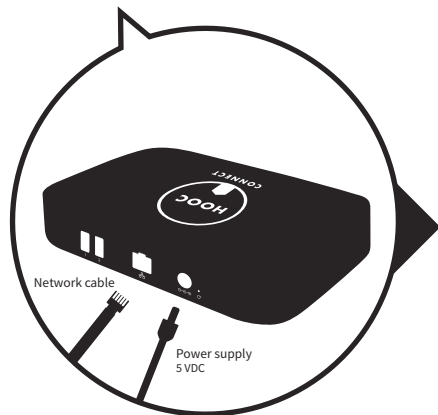


GB

STEP 1

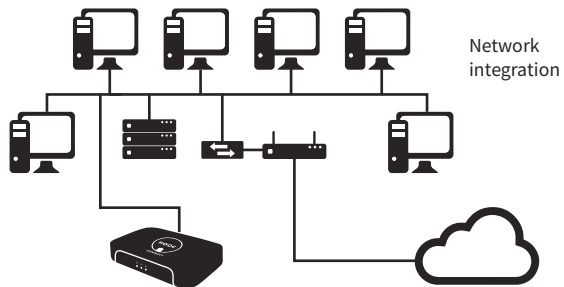

Connect network cable and power supply.
Wait for 60 seconds!

GB

STEP 2

Ready

Fail

BLINK CODE

WHITE FLASHING
 ○○○○○○
 WHITE PERMANENT
 ●●●●●●
 WHITE PERMANENT
 ●●●●●●



LED-Power
 LED-Uplink
 LED-Status

Go to STEP 3



www.hooc.ch/connect/fail

GB

STEP 3



[www.hooc.ch /connect](http://www.hooc.ch/connect)



Login



Add Site



Link HOOC Connect



Serialnumber



HOOC Connect T Technical Data

Supply	Supply voltage	5 VDC
	Power consumption*	max. 1.65 W
	Current consumption*	330 mA
Enclosure	IP 20	
Safety class	II	
Temperature	Operation	0 °C to +45°C
	Storage	-25 °C to +55°C
Design	Dimensions	30 x 150 x 100 mm (HxWxD)
Network	The IP address is received from the DHCP server.	
	Permanent static address for service.	IP: 172.17.17.17
		Subnet: 255.255.255.0