


GB

## STEP 1

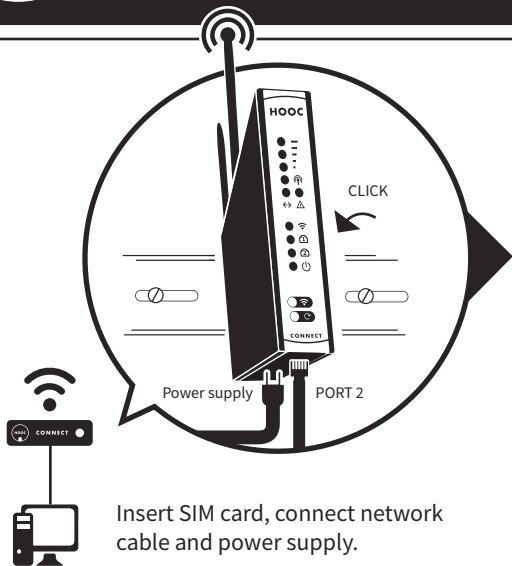

GB

## STEP 2


[www.hooc.ch/connect](http://www.hooc.ch/connect)


Login



Add site



Link HOOC Connect



Serialnumber

11111111111111111111

GB

## STEP 3



Open URL 192.168.2.1



Configure HOOC Connect

## HOOC Connect M Technical Data

Supply	Supply voltage	DC 5~36V
	Power consumption	Max. 2.95W@12VDC
	Current consumption	120mA@12VDC
Temperature	Operation	-20°C to +70°C
	Storage	-40°C to +75°C
Design	Dimensions	110 x 29 x 100mm (HxWxD)
	DIN rail or wall mounting	
Certification	CE/RoHS	
Mobile Network	G806-E 4G FDD-LTE	1/3/5/7/8/20
	G806-E 4G TDD-LTE	38/39/40/41
	G806-E 3G WCDMA/HSPA/UMTS	1/8
	G806-E 2G GPRS/GSM/EDGE	3/8
	SIM Standard 6 pin SIM card	3V/1.8V SIM card
WIFI Network	802.11b/g/n	
	Port 1	WAN (DHCP Client)
	Port 2	192.168.2.1/24